

# A Fusion of the Art and Science of Light



## AXXNT PRODUCT DETAILS:

date: September 22, 2008

sheet description: AXXNT Details


file: AXdetails.pdf

page: 1 of 1

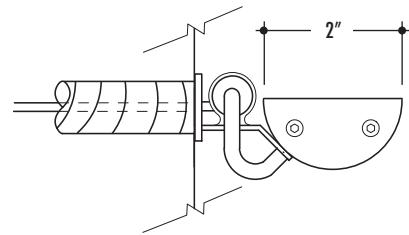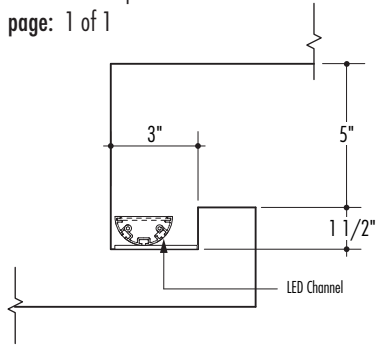


LED - S01

Wall Mount



LED - S02

Base or Cove Mount

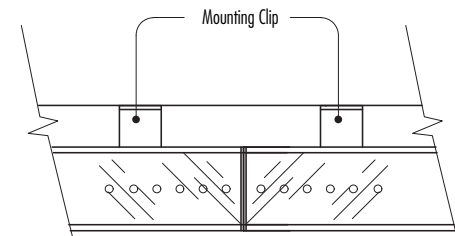


ESS


End Stop/Start

AXXNT Driver Specifications			
PRI V	120	SEC V	24
PRI A	.5	SEC A	2.5
PRI VA	60	WATTS	60

X	4.25"
Y	3.25"
Z	8.5"




Driver

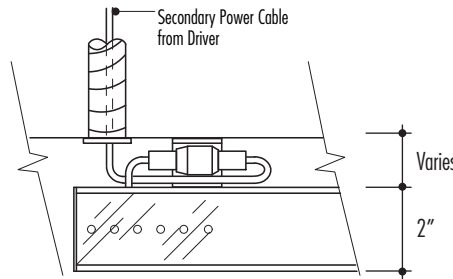


LEF

Left End Feed



LES



Left End Stop

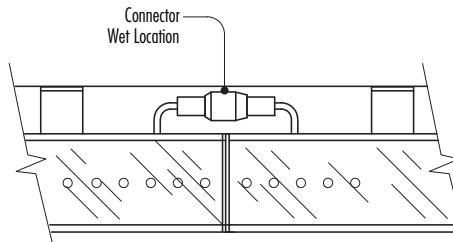


IMC

Intermediate Connect

# DETAILS AXXNT

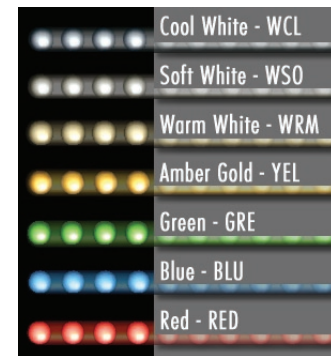

Cove Mount - Beam Spread



Wall Mount - Beam Spread

Project Name

Date

Linear Feet

**SPECIFICATION CODE:** Note: For a variation (custom) of this product contact ACL to request a variation number and information.

AX	-	-	-	-	CAA	-	-	DI	-
Product	Standard	Environment	Color	Finish	Primary	Dim-able	Beam		
AX - Axxnt (LED)	S01 - Wall Mount S02 - Cove Mount	DR - Dry DP - Damp WT - Wet	See Color Chart (1)	CAA (Clear Anodized Aluminum, S01 and S02 only)	120V 277V (2)	DI - Dim	30° 120°		

(1) For multiple selections place a comma after each selection.

(2) Special order, contact ACL for information.